

SBA

S-Beam


Request Info



> Specifications


Model	SBA	
Rated Capacity (kgf)	25,50,100,200,500,1K,2K,3K,5K	
Accuracy Class	D3	C3
Combined Error (% R.O)	≤0.03	≤0.02
Creep for 30 min. (% R.O)	≤0.03	≤0.017
Excitation	Recommended (V)	10
	Maximum (V)	15
Compensated Temperature Range(°C)	-10~+40	
Operating Temperature Range(°C)	-30~+80	
Material & Plate	Nickel Plated Steel	

► Load Cell

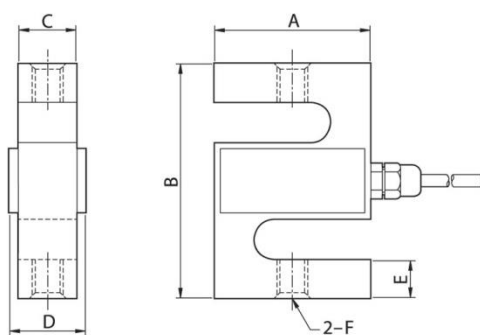

Capa.	A	B	C	D	E	F
25kgf	50.8	63.5	12.7	20	10.3	M6 x 1.0
50kgf	51	76	19	27	12.6	M12 x 1.75
100kgf	51	76	25.4	33	12.6	M12 x 1.75
200kgf	77	108	25.4	33	19	M18 x 1.5
500kgf	77	108	25.4	33	19.5	M18 x 1.5

► Accessory Assembly(Lod End)

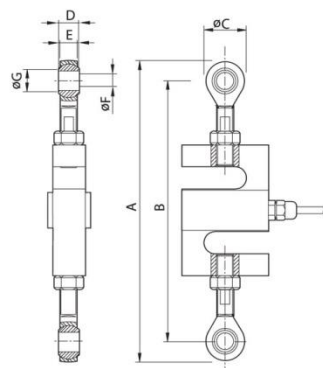

Capa.	A	B	C	D	E	F	G
25kgf	134.1(Max)	115.6	18.5	9	6.8	9	12
50kgf	211.1	177.1	34	16	12	12	15.4
100kgf	318	258	60	23	22	18	21.9
200kgf	317	257	60	23	22	18	21.9