


BCA

Single Point Load Cell

[Request Info](#)

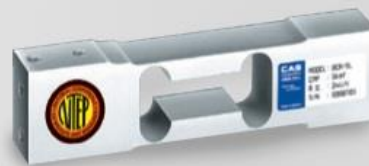

> Specifications

Model	BCA	
Rated Capacity (kgf)	5,10,15,20,30,50,75,100	
Accuracy Class	D3	C3
Combined Error (% R.O)	≤ 0.03	≤ 0.02
Creep for 30 min. (% R.O)	≤ 0.03	≤ 0.017
Excitation	Recommended (V)	10
	Maximum (V)	15
Compensated Temperature Range(°C)	-10~+40	
Operating Temperature Range(°C)	-20~+70	
Material & Plate	Anodized Aluminum	

Unit: mm

