

# HBS

## Bending Beam


Request Info



### > Specifications

Model	HBS	
Rated Capacity (kgf)	10,20,30,50,100,200,300,500,1K,2K	
Accuracy Class	D3	C3
Combined Error (% R.O)	≤0.03	≤0.02
Creep for 30 min. (% R.O)	≤0.03	≤0.017
Excitation	Recommended (V)	10
	Maximum (V)	15
Compensated Temperature Range(°C)	-10~+40	
Operating Temperature Range(°C)	-30~+80	
Material & Plate	Stainless Steel	

Unit: mm

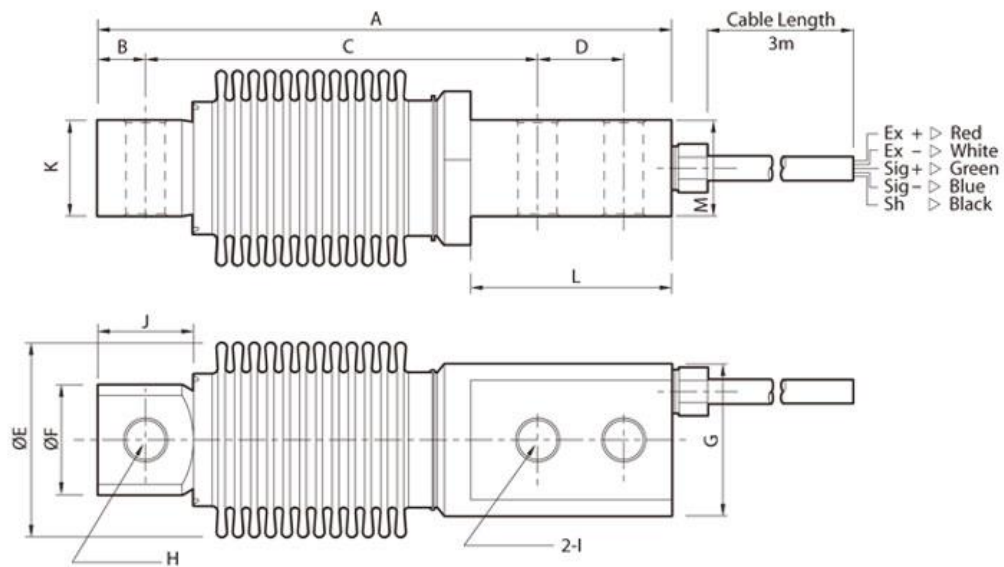

Capa.	A	B	C	D	E	F	G	H	I	J	K	L	M
10kgf~500kgf	120	10	82	18	Ø40	3	31.75	Ø8.2	Ø8.2	20	20	42	20
1tf~2tf	210	20	125	50	6	Ø40	52	6	Ø18	40	30	90	40